
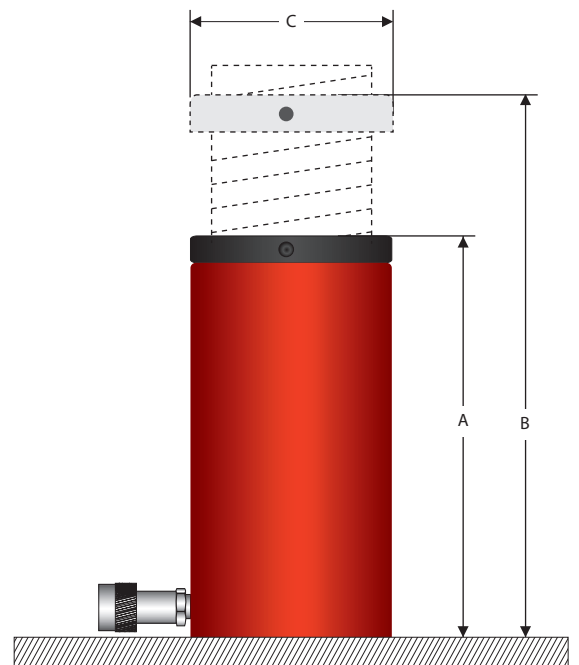


# Lock Nut Cylinder

Series : LLG - Gravity Return

Capacity : 50 - 500 Ton | Stroke Length : 50 - 150 mm | Working Pressure : 700 Bar

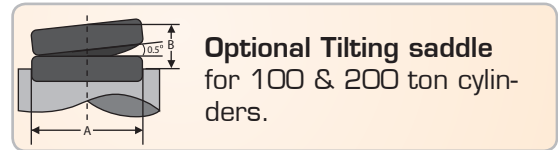

- High strength alloy steel construction.
- Over flow port for stroke limit.
- Single acting load return type.
- Hard chrome plating for cylinder bore, Plain & threaded piston rod to resist corrosion.
- Fitted with standard 3/8" NPT threaded female coupler.

Model	Cylinder Capacity (Tons)	Stroke (mm)	Effective Area (cm <sup>2</sup> )	Oil Capacity (cc)	Retracted Height (mm)	Extended Height (mm)	Cylinder Outer Dia (mm)	Metric Tonnes @ 700 Bar	Weight (kg)
					A	B	C		
LLG5050	50	50	70.9	355	164	214	125	50.59	15
LLG5010		100	70.9	709	214	314	125	50.59	20
LLG5015		150	70.9	1064	264	414	125	50.59	25
LLG10050	100	50	132.7	664	187	237	165	94.69	30
LLG10010		100	132.7	1327	237	337	165	94.69	39
LLG10015		150	132.7	1991	287	437	165	94.69	48
LLG15010	150	100	198.6	1986	259	359	205	141.71	66
LLG15015		150	198.6	2979	309	459	205	141.71	78
LLG20050	200	50	265.6	1330	243	293	235	189.52	83
LLG20015		150	265.6	6648	343	493	235	189.52	152
LLG30015	300	150	456.2	6843	395	545	310	325.52	233
LLG40015	400	150	559.9	8399	435	585	350	399.52	327
LLG50015	500	150	731.1	18278	575	725	400	521.68	567

\* Higher capacities are available upon request.