



# Air Driven Hydro Test Pump

Series : LDAP



Models LDAP200D is fixed with double ended single acting pumps picture (B) produces high pressure liquid flows upto 2.5 gallons per minute and pressure

upto 20000 psi. The pumps are featured with fewer moving parts and seals which reduces maintenance. Pump unit is ideal for hydrostatic testing

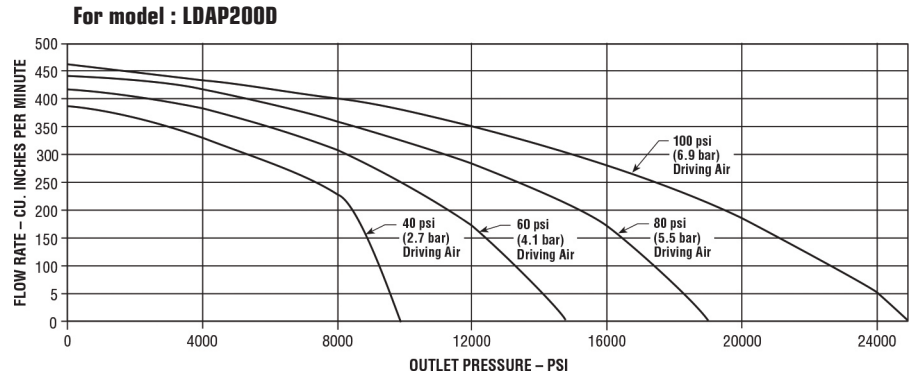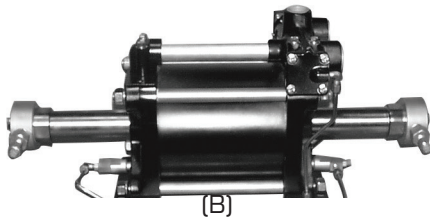

Discharge Capacity - Cubic Inchs (Liters) per Minute - Approximate  
Based on 350 SCFM of air flow @ 100 psi

Pump Model No.	0psi (0 bar)	4000psi (276 bar)	8000psi (552 bar)	12000psi (828 bar)	16000psi (1104 bar)	20000psi (1380 bar)
LDAP200D	525 (8.6)	510 (8.36)	470 (7.7)	375 (6.15)	230 (3.77)	-

# Manual Hydro Test Pump

Series : MTP

- Models are available up to 1000 bar pressure.
- Models with SS tanks are available upto 700 Bar
- Light weight and portable.
- Output port size 3/8" NPT female
- All models are supplied with suitable pressure gauge.
- Suitable to use non-corrosive multi fluids.
- For models with SS tank add suffix SS to the model numbers.



MTP-L1, L3, L5, L7

Model	Working Pressure (Bar)	Flow Per Stoke(CC)	Reservoir Capacity (Liters)	Weight(Kgs)
MTP-L1	100	4.01	7	10
MTP-L3	300	3.07		
MTP-L5	500	2.26		
MTP-L7	700	1.57		
MTP-L10	1000	1.57		