

Air Driven Torque Wrench Pumps

Series : LLT

- External adjustable torque settings pressure relief valve as standard.
- Supplied with filter, lubricator as standard
- Maximum working pressure 700 Bar.
- In-built cooling system.
- Dual scale pressure gauge.
- Provides with auto retract function as standard.
- Option for multi outlet ports.





Use Lifton LTH series twin hose assembly with double acting torque wrench and torque pump to ensure the integrity of your hydraulic system



Lifton torque pumps are also available with digital pressure gauges up on request. Add suffix "DG" with the pump model

number to order pump with digital pressure gauge

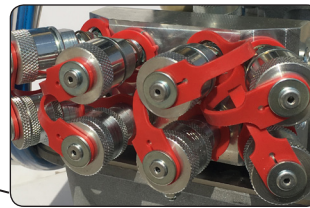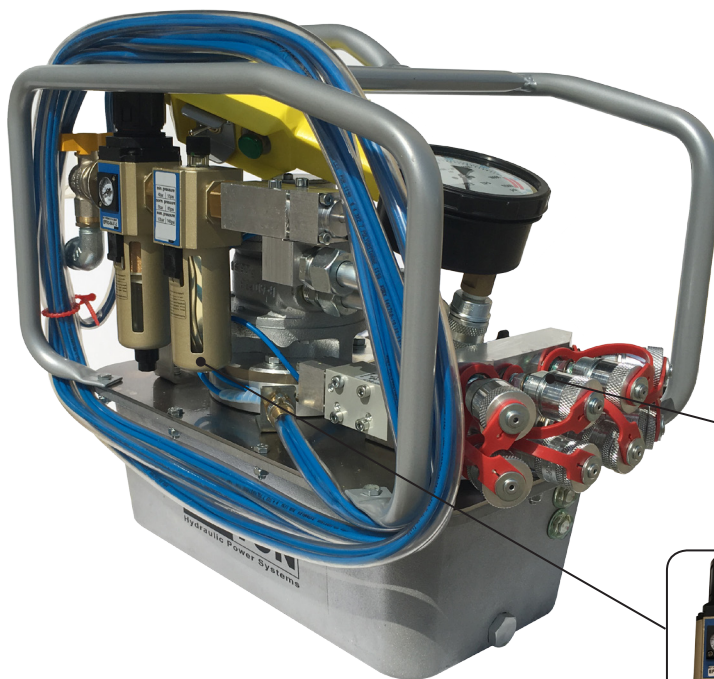

4 Outlet Valve Assembly (optional)



Filter & Lubricator

Drive	Model	Valve	Max. Flow Rate (LPM)			Source of Power/ Capacity	Tank Capacity (Liter)	Dimension (LxBxH) mm	Weight (Kg)
			Low	Mid	High				
Air	LTP2A	Single outlet Pneumatic. Solenoid Valve	12.5	2.2	1.1	8 Bar / 1.5 Kw	8	520x275x395	27
Air	LTP4A	4Outlet Pneumatic. Solenoid Valve	7	1.6	0.8	8 Bar / 1.1 Kw	8	300x375x458	25

We can customize nonstandard and special cassettes, please contact LIFTON's representative